
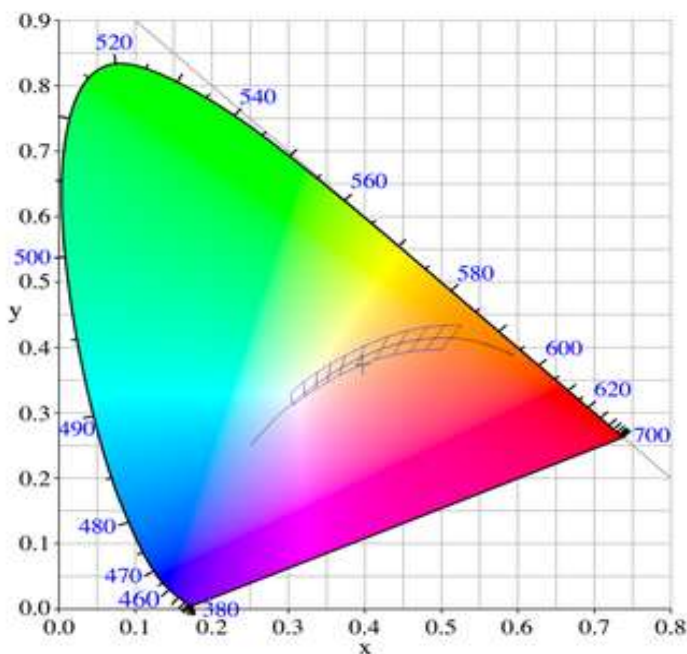


**SSL-DV-LIN-4-UNV-TW-HLO-12-ARC-AAL-DMX (ALL ON (3500K))**

Test by	Garrett Morrison	Integration Time	836.4
Notes	All channels on	Saturation	81%
Test Lab	Illuminations Testing Laboratory	Test No.	Scan id 41
Test Date	2/16/24 10:49 AM	Manufacturer	SSL

**Relative Spectral Power Distribution**

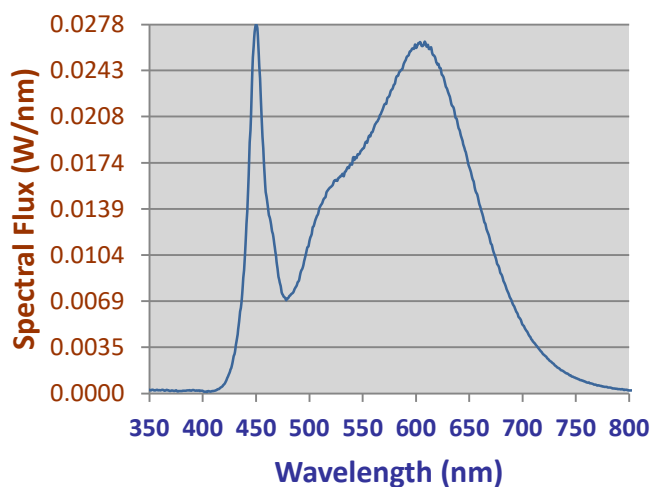

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
1423.5	16.054	119.989	0.136208	88.666456	0.982307	8.418

CCT	CRI	x	y	Duv	u'	v'
3547.0	88.794	0.3972	0.3743	-0.0056	0.2373	0.5030

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
89	95	96	88	89	92	87	73	38	87	89	76	91	98

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
449.771	583	87.4089	99.5583

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
21.21094388	4.467053631

Radiant Flux	Purity
4.645855919	31.5164301

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/16/24 10:49 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmed Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		