
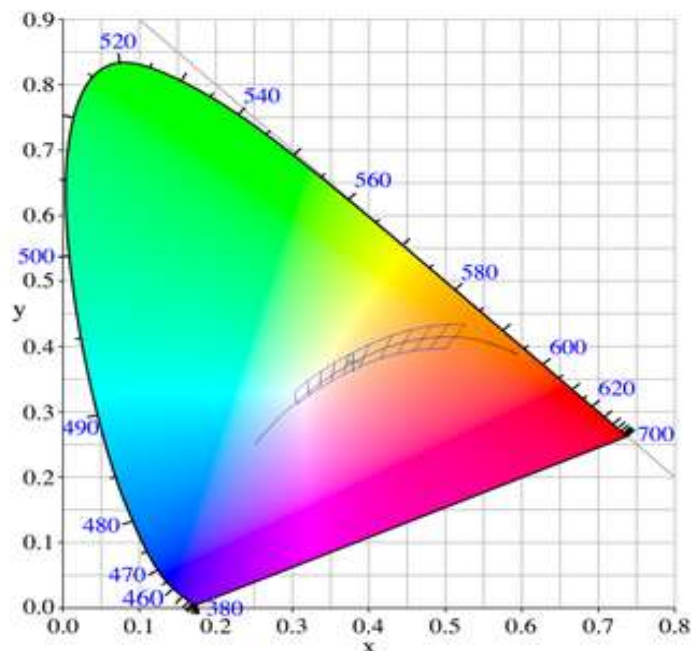


## SSL-DV-LIN-4-UNV-TW-HLO-12-ARC-AAL-DMX (4000K)

Test by	Garrett Morrison	Integration Time	745.9
Notes	Channel 3 on, other channels off	Saturation	79%
Test Lab	Illuminations Testing Laboratory	Test No.	Scan id 44
Test Date	2/16/24 10:51 AM	Manufacturer	SSL

### Relative Spectral Power Distribution

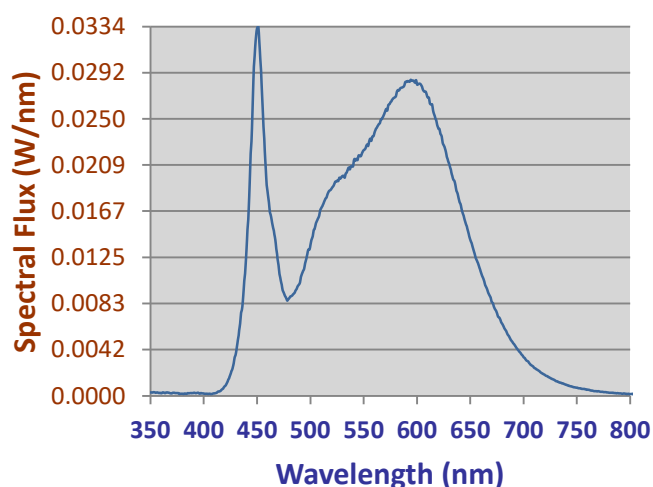

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
1624.2	16.190	120.006	0.137321	100.320512	0.982442	8.5383

CCT	CRI	x	y	Duv	u'	v'
4018.0	83.468	0.3796	0.3760	-0.0001	0.2248	0.5011

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
82	90	96	82	82	86	86	64	8	76	82	64	84	98

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
450.203	579	84.3823	95.4326

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
22.56596903	4.827982166

Radiant Flux	Purity
4.950320521	26.75515131

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/16/24 10:51 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmed Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		