
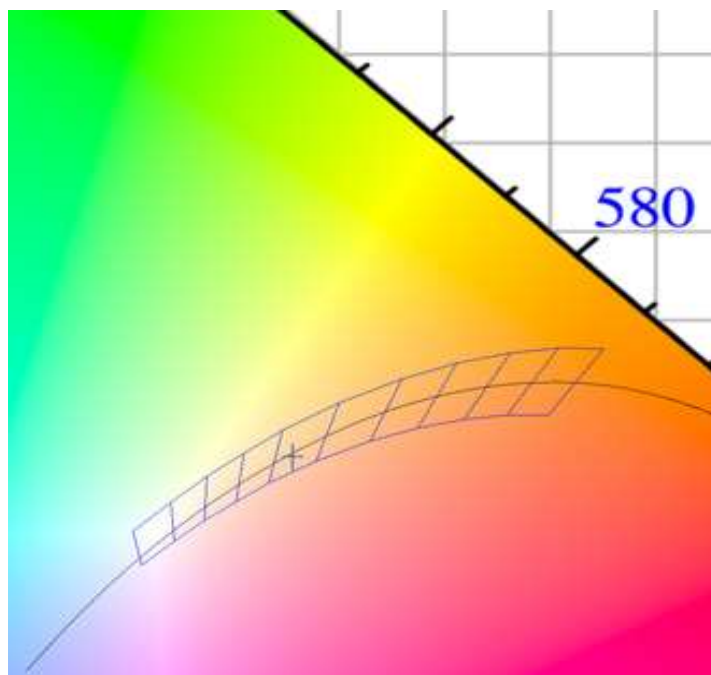


SSL-DV-LIN-1-UNV-TW-RLO-12-ARC-AAL-DMX (4000K)

Test by	Garrett Morrison	Integration Time	5000
Notes	Channel 3 on, other channels off	Saturation	59%
Test Lab	Illuminations Testing Laboratory	Test No.	34
Test Date	2/14/24 11:42 AM	Manufacturer	SSL

Relative Spectral Power Distribution

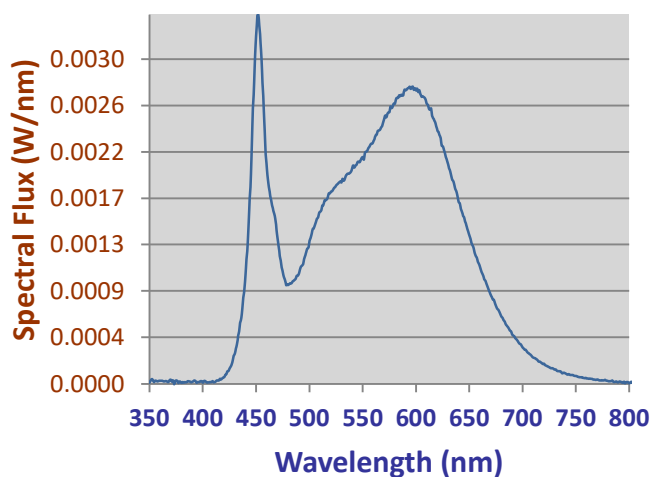

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
155.5	2.608	120.049	0.0242761	59.6404102	0.894801	13.6084

CCT	CRI	x	y	Duv	u'	v'
4027.0	84.340	0.3785	0.3731	-0.0012	0.2253	0.4997

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
83	92	96	82	83	88	85	65	12	80	82	64	86	98

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
451.776	579	84.3778	94.8646

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
2.178884601	0.466174222

Radiant Flux	Purity
0.474047525	25.53855759

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/14/24 11:42 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmable Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		