
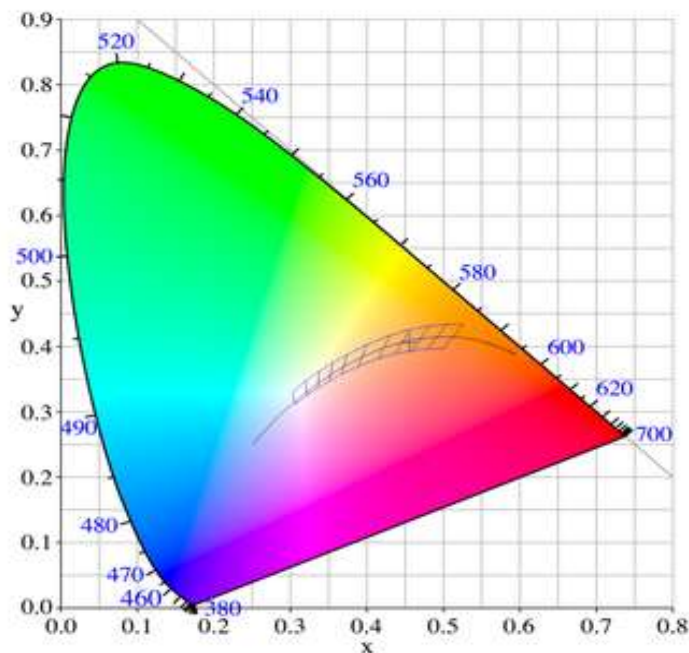


SSL-DV-LIN-4-UNV-TW-HLO-12-ARC-AAL-DMX (2700K)

Test by	Garrett Morrison	Integration Time	660.4
Notes	Channel 2 on, other channels off	Saturation	80%
Test Lab	Illuminations Testing Laboratory	Test No.	Scan id 43
Test Date	2/16/24 10:50 AM	Manufacturer	SSL

Relative Spectral Power Distribution

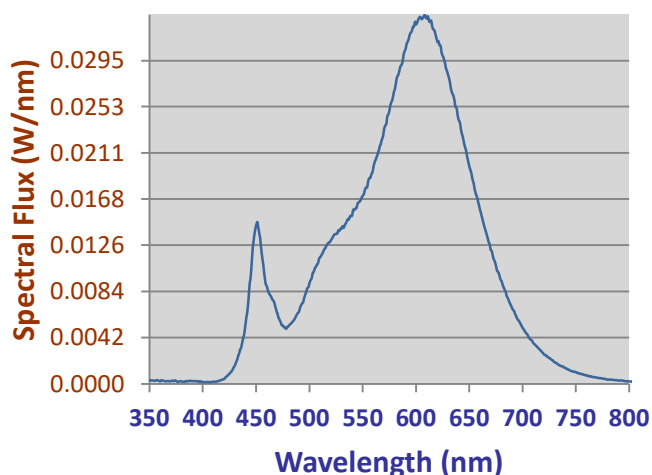

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
1497.6	16.252	120.026	0.137807	92.1481658	0.982579	8.61071

CCT	CRI	x	y	Duv	u'	v'
2712.0	82.631	0.4563	0.4057	-0.0015	0.2624	0.5249

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
82	93	94	81	83	93	80	56	6	84	81	79	85	97

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
606.459	584	85.0558	96.4362

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
21.78416287	4.47273787

Radiant Flux	Purity
4.643209841	58.7537036

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/16/24 10:50 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmed Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		