
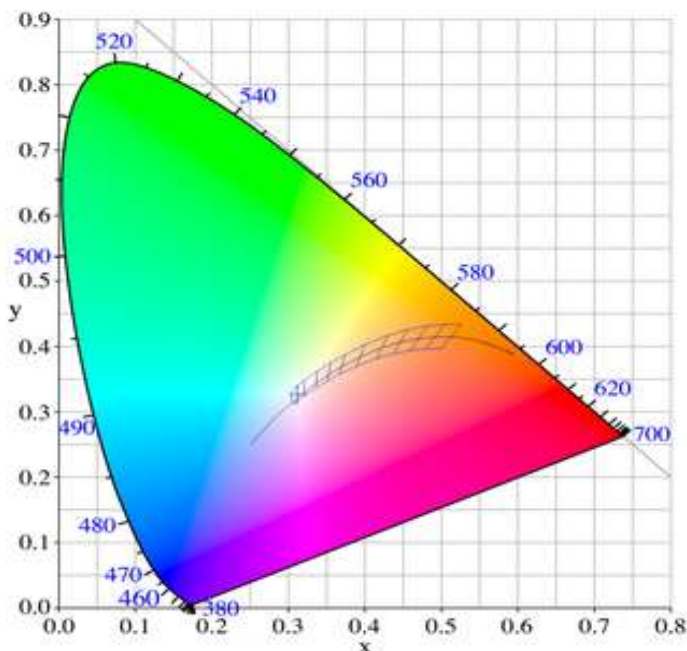


SSL-DV-LIN-4-UNV-TW-HLO-12-ARC-AAL-DMX (6500K)

Test by	Garrett Morrison	Integration Time	745.9
Notes	Channel 4 on, other channels off	Saturation	83%
Test Lab	Illuminations Testing Laboratory	Test No.	Scan id 45
Test Date	2/16/24 10:52 AM	Manufacturer	SSL

Relative Spectral Power Distribution

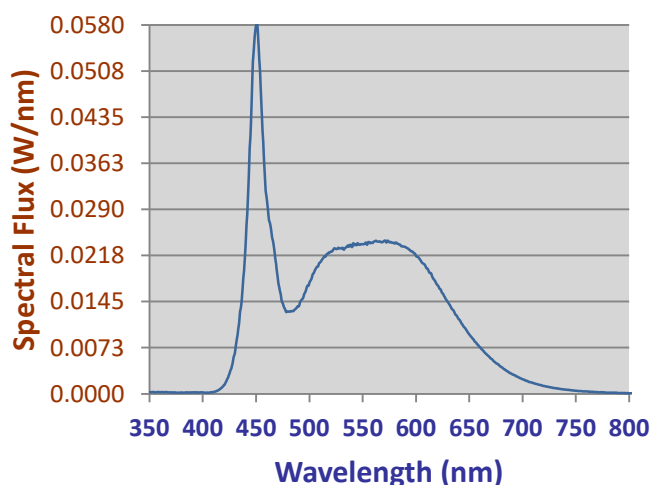

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
1577.2	16.062	120.015	0.136242	98.1929368	0.982336	8.45899

CCT	CRI	x	y	Duv	u'	v'
6563.0	84.114	0.3120	0.3266	0.0023	0.1982	0.4669

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
83	89	92	84	83	83	88	71	10	72	84	59	85	96

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
450.125	487	83.6083	94.8256

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
22.67082805	5.053623219

Radiant Flux	Purity
5.134604121	7.71649278

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/16/24 10:52 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmed Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		