
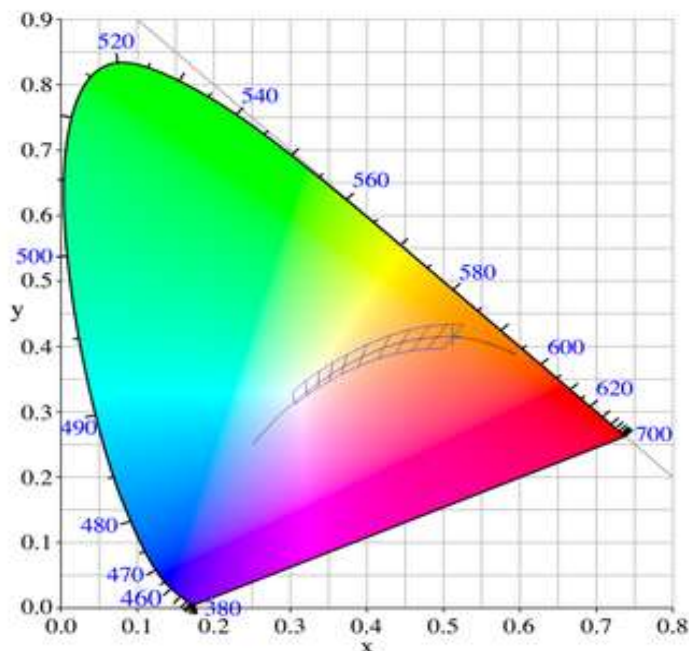


SSL-DV-LIN-4-UNV-TW-HLO-12-ARC-AAL-DMX (2200K)

Test by	Garrett Morrison	Integration Time	944.7
Notes	Channel 1 on, other channels off	Saturation	79%
Test Lab	Illuminations Testing Laboratory	Test No.	Scan id 42
Test Date	2/16/24 10:50 AM	Manufacturer	SSL

Relative Spectral Power Distribution

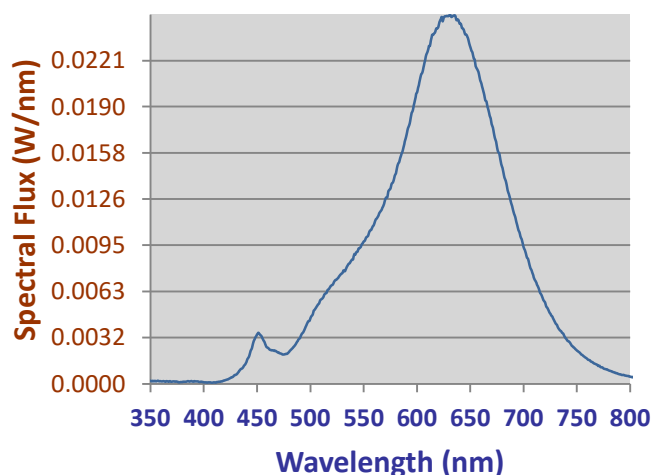

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
905.6	15.497	119.995	0.131576	58.4412236	0.981508	8.18063

CCT	CRI	x	y	Duv	u'	v'
2138.0	93.518	0.5121	0.4151	0.0001	0.2945	0.5370

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
94	98	99	95	95	98	90	79	59	95	98	95	95	99

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
630.493	587	93.1336	99.8712

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
16.45548163	3.241784912

Radiant Flux	Purity
3.572746159	78.32885584

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/16/24 10:50 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmed Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		