
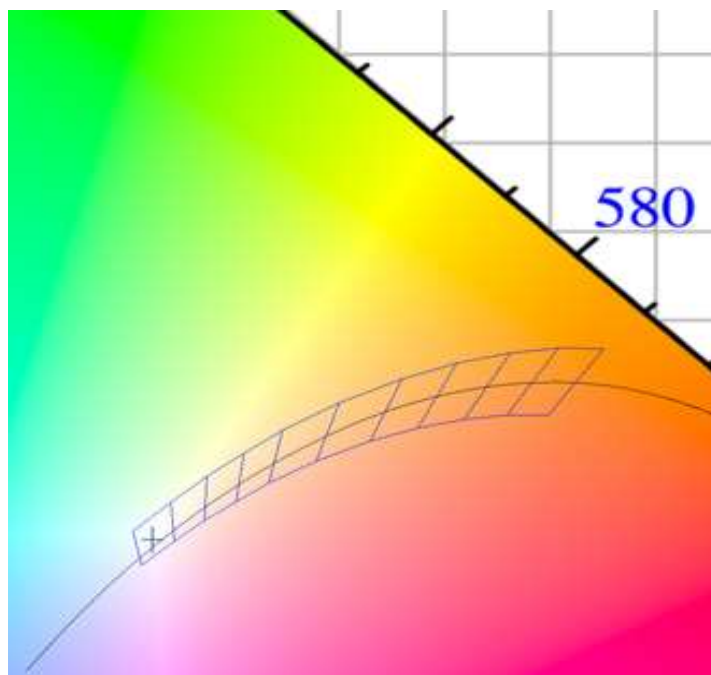


SSL-DV-LIN-1-UNV-TW-RLO-12-ARC-AAL-DMX (6500K)

Test by	Garrett Morrison	Integration Time	5000
Notes	Channel 4 on, other channels off	Saturation	65%
Test Lab	Illuminations Testing Laboratory	Test No.	35
Test Date	2/14/24 11:42 AM	Manufacturer	SSL

Relative Spectral Power Distribution

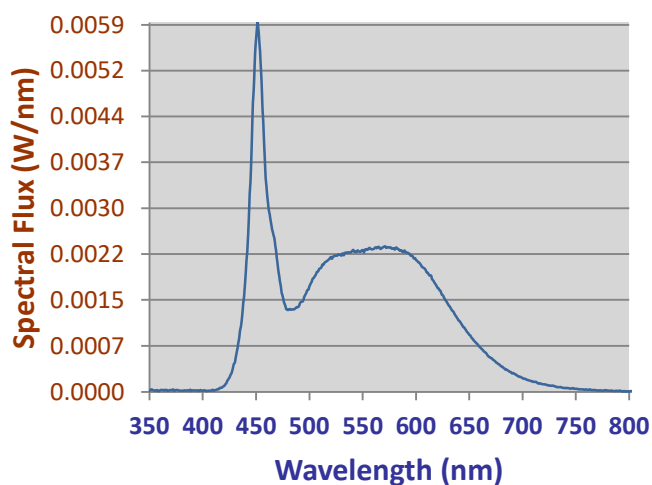

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
153.6	2.611	120.012	0.0243619	58.8332694	0.893222	13.8114

CCT	CRI	x	y	Duv	u'	v'
6571.0	84.836	0.3119	0.3261	0.0021	0.1984	0.4667

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
84	90	93	84	84	84	88	71	13	76	84	58	86	97

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
451.342	487	83.67	94.1525

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
2.215658396	0.493528969

Radiant Flux	Purity
0.497897549	7.78225051

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/14/24 11:42 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmable Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		