
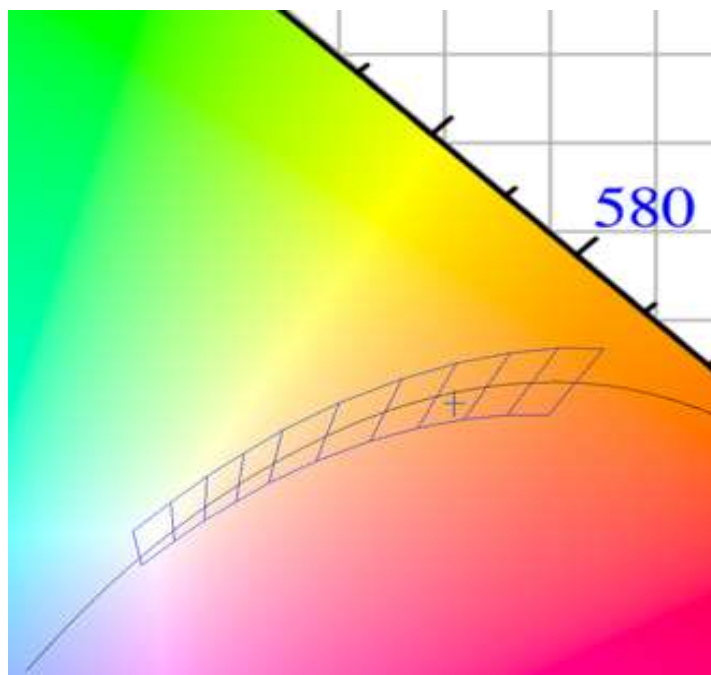


SSL-DV-LIN-1-UNV-TW-RLO-12-ARC-AAL-DMX (2700K)

Test by	Garrett Morrison	Integration Time	5000
Notes	Channel 2 on, other channels off	Saturation	67%
Test Lab	Illuminations Testing Laboratory	Test No.	33
Test Date	2/14/24 11:41 AM	Manufacturer	SSL

Relative Spectral Power Distribution

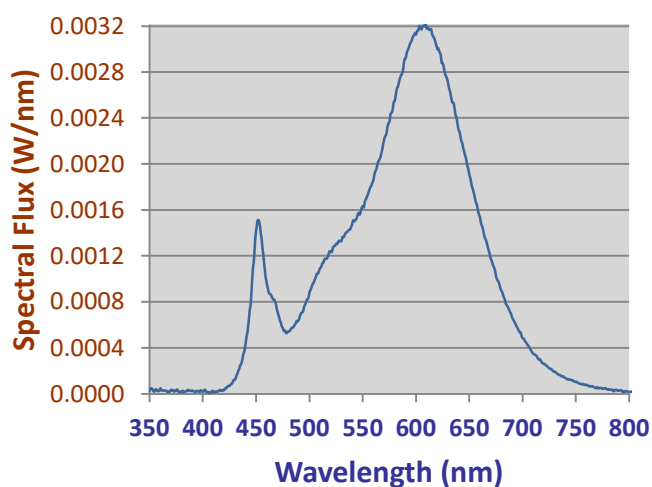

Lumens	Watts	Volts	Amps	Efficacy	PF	ITHD
142.9	2.609	120.028	0.0243865	54.7638893	0.891517	14.7473

CCT	CRI	x	y	Duv	u'	v'
2713.0	82.870	0.4549	0.4033	-0.0023	0.2626	0.5238

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
83	94	93	81	83	94	80	56	8	86	81	79	85	97

Peak Wavelength	Dominant Wavelength	Colour Fidelity Index	Gamut Index
606.892	584	85.0558	96.1518

Photosynthetic Photon Flux (PPF)	Photosynthetically Active Radiation
2.090125216	0.429324239

Radiant Flux	Purity
0.443614126	57.5886661

Fixture and Test Information			
Temperature	Humidity	Test Date:	Manufacturer:
25.0°C	20%	2/14/24 11:41 AM	SSL
Driver Manufacturer	Driver Manufacturer Part Number		
Programmable Driver?	Drive Current		
LED Manufacturer	LED Manufacturer Part Number		